



HVAC Products


SUBMITTAL

Mar 2018

308 SERIES DUAL EXPANSION JOINT 4" TRAVEL W/WELD ENDS

PROJECT:	
CUSTOMER:	
ENGINEER:	
ARCHITECT:	

MATERIALS OF CONSTRUCTION	
'A' PIPE SCH 40:	CARBON STEEL
'B' CAPSULE:	T-304 STN STL
'C' BASE PLATE:	CARBON STEEL
'D' PLATE FLANGES:	CARBON STEEL

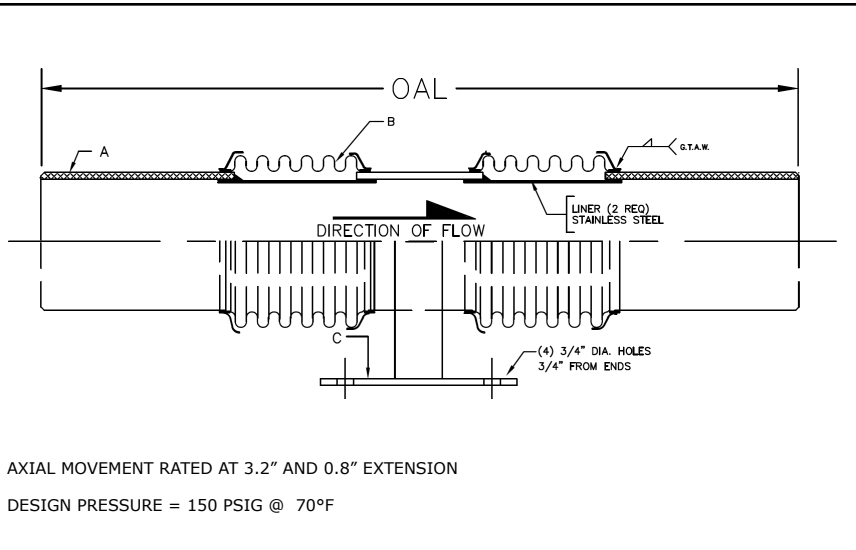

QTY	ID # OR TAG #	DIA (IN)	KEFLEX PART #	OAL	AXIAL FORCE TO COMPRESS (LBS)	WEIGHT (LBS)	3D Model (.stp)
		2"	F020M308DB904	24"	175	19	
		2 1/2"	F024M308DB904	24"	350	19	
		3"	F030M308DB904	24"	225	37	
		4"	F040M308DB904	24"	575	52	
		5"	F050M308DB904	24"	350	61	
		6"	F060M308DB904	24"	400	72	
		8"	F080M308DB904	24"	575	91	
		10"	F100M308DB904	24"	850	120	
		12"	F120M308DB904	24"	475	154	


Typical Installation

1st Pipe Guide (and anchor) placed a maximum distance of 4 X pipe diameter from expansion joint,

2nd pipe guide placed maximum of 14 X pipe diameter from first guide.

Additional guides placed per EJMA guidelines

Pipe Guide – Spider type (size appropriate for total pipe motion)

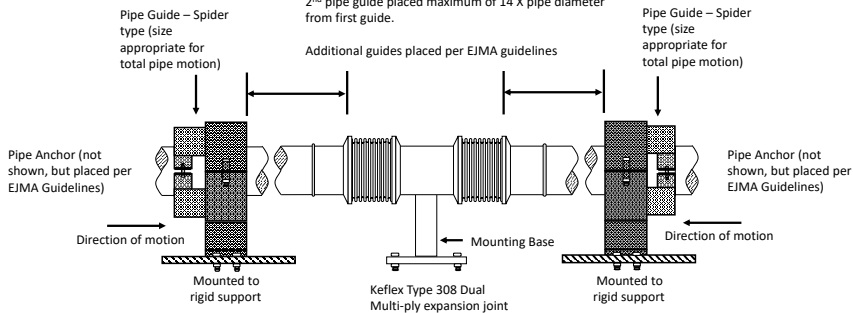

IMPORTANT LINKS

BROCHURE:	
INSTALLATION INSTRUCTIONS:	
TECHNICAL DATA:	
WEBSITE:	FLEX-WELD.COM



MADE IN THE USA

**1425 LAKE AVE
WOODSTOCK, IL 60098
800-323-6893**